

SAFETY • SEARCH • RESCUE



Celebrating 30 years of uncompromising service!



Pelican Rope Works
Ph: 888.860.7673
Fax: 714.545.7673
www.pelicanrope.com



U.S. Rigging Supply
Ph: 888.260.7444
Fax: 714.545.3311
www.usrigging.com



4001 W. CARRIAGE DRIVE • SANTA ANA, CA 92704




CLIMBING ROPES

Ropes & Accessories

Arborist Ropes 1/2" Dia. 16-Strand Braided Cover over Parallel Core

This rope features a non-rotational construction that leads to fewer snags and minimal abrasion for longer rope life. A high strength Polyester/Nylon composite rope with minimal cover milking.

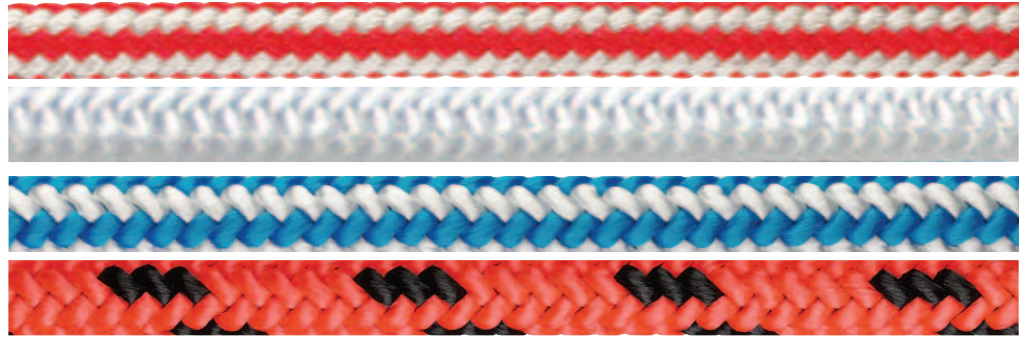

PART NO.	DIA.	TENSILE STRENGTH	Wt. Per 100'	COLOR	Std. Pkg.	Hanks
4AR-1605-06S	1/2"	8,260 lbs.	7.73 lbs.	Orng./Wht.	600 ft. spool	120 Ft. & 150 Ft.
4AR-160-06S	1/2"	8,260 lbs.	7.73 lbs.	White	600 ft. spool	
4AR-1601-06S	1/2"	8,260 lbs.	7.73 lbs.	Blue/Wht	600 ft. spool	
4AR-1654-06S	1/2"	8,260 lbs.	7.73 lbs.	Orng/Blk	600 ft. spool	

TigerLine™ →

Static Kernmantle Composite Ropes


Block Creel Static Kernmantle construction. These life lines are among the finest for fire and rescue services. Ropes feature a Polyester cover over a Nylon core and are firm and flexible enough to be tied. This rope features resistance to most chemicals and has excellent retention in extreme conditions.

U.L. Certified to NFPA 1983-2001 edition standards.

Rope comes with waterproof ID tape. WLL 15:1 safety factor.



Part No's.: 2WP-121-06S (3/8") • 2WP-161-06S (1/2") • 2WP-141-06S (7/16") • 2WP-201-06S (5/8")



Part No's.: 2WP-120-06S (3/8") • 2WP-160-06S (1/2") • 2WP-140-06S (7/16") • 2WP-200-06S (5/8")



Part No's.: 2WP-122-06S (3/8") • 2WP-162-06S (1/2") • 2WP-142-06S (7/16") • 2WP-202-06S (5/8")



Part No's.: 2WP-12Y-06S (3/8") • 2WP-16Y-06S (1/2") • 2WP-14Y-06S (7/16") • 2WP-20Y-06S (5/8")



Part No's.: 2WP-12L-06S (3/8") • 2WP-16L-06S (1/2") • 2WP-14L-06S (7/16") • 2WP-20L-06S (5/8")



Part No's.: 2WP-125-06S (3/8") • 2WP-165-06S (1/2") • 2WP-145-06S (7/16") • 2WP-205-06S (5/8")

DIA.	TENSILE STRENGTH	Wt. Per 100'	Std. Pkg.	Hanks
3/8"	6,500 lbs.	4.8 lbs.	600 ft. spool	120 Ft. & 150 Ft.
7/16"	8,000 lbs.	5.8 lbs.	600 ft. spool	
1/2"	11,500 lbs.	9.0 lbs.	600 ft. spool	
5/8"	13,000 lbs.	12.0 lbs.	600 ft. spool	



U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com

PRUSIK LINES Ropes & Accessories

5/16" Dia. Technora

6,200 lb. tensile strength. Very high heat and abrasion resistance. A high performance Technora cover over Polyester core. Technora aramid fiber decomposes at 500° Centigrade. (932° F)



Part No.: 1S-10T-06S Dia: 5/16" Color: Natural (Gold)

SPECIFICATIONS:

Construction: Braided Polyester cover/Parallel Nylon core
Avg. Tensile Strength: 6,200 lbs.
Avg. lbs. per 100 ft.: 2.7 lbs.
Standard Pkg: 600 ft. spool



1/4" and 5/16" Dia. Composite Braid

Constructed of 16-strand braided composite Polyester over Nylon parallel core. This rope features excellent holding power when tying Prusik knots.



Colors Available

Blue • Yellow • Red
White • Black

Part Number	DIA.	Tensile Strength Avg. Lbs.	Aprx. Weight (lbs. per 100 ft.)	Color	Std. Spool
1S-08	1/4"	2,700	2.2	Specify	600 ft
1S-10	5/16"	4,200	9.5	Specify	600 ft

BULL ROPES (Urethane Coated) Ropes & Accessories

Premium Double Braid Composite Fiber

Double-braid/composite construction of Polyester cover over Nylon core for higher tensile strength and better shock load performance. Urethane coated for abrasion resistance.



Part Number	DIA.	Tensile Strength Avg. Lbs.	Aprx. Weight (lbs. per 100 ft.)	Urethane Color	Std. Spool	Std. Hank
4BR-16C3-06S	1/2"	10,050	7.6	Green	600 ft	150 ft.
4BR-18C1-06S	9/16"	12,285	9.5	Blue	600 ft	150 ft.
4BR-20C5-06S	5/8"	15,320	12.0	Orange	600 ft	150 ft.
4BR-24CY-06S	3/4"	25,730	16.7	Yellow	600 ft	150 ft.

HELMETS

Ropes & Accessories

KONG "MAGIC" HELMETS

Lightweight, comfortable and durable. A rugged Polycarbonate shell with adjustable chin straps. The "Magic" helmet is perfect for climbing and fall protection applications.



SPECIFICATIONS:

Construction: Polycarbonate

Weight: 14.5 oz.

Colors: White, Red, Black, Blue, Yellow

Part No: KNG-997



KONG WORK HELMET



Part Number	Color	Size (In.) (adjustable)	Weight oz. (gr)
KNG-998-WSM	White	6 1/2" - 7 3/8"	10.3 (295)
KNG-998-WLX	White	7 1/4" - 7 7/8"	10.8 (310)
KNG-998-RSM	Red	6 1/2" - 7 3/8"	10.3 (295)
KNG-998-RED	Red	7 1/4" - 7 7/8"	10.8 (310)

The all new general purpose work helmet. Lighter, tougher ABS construction and featuring a head-size adjusting knob along with spring clips for attaching goggles, head-lamps, head phones, etc. Chin-straps feature greater length with three adjusting points and a soft chin pad for greater comfort. A quality, stylish, strong but light work helmet featuring the latest technology.

Special Features



Attachments





(not included)

LANYARDS

Ropes & Accessories

Adjustable Safety Lanyards

Made from white three-strand twisted Polyester rope or double braided Polyester with hand-spliced eyes. Shrink tubing forms a tapered cover over the tails. The forged alloy steel, double-locking safety snap hook is tested and rated at 5,000 lbs. break strength.

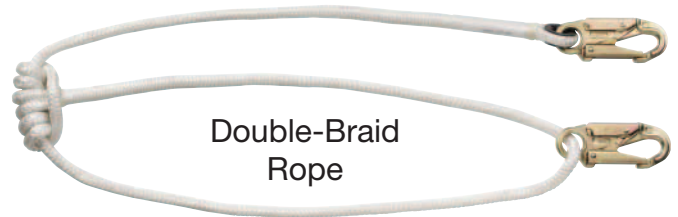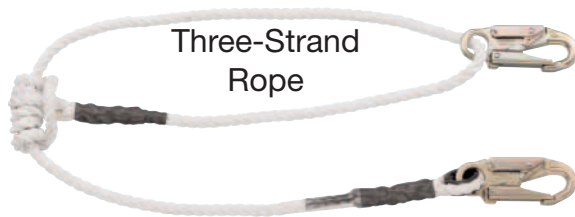


US PART #	DESCRIPTION	ADJUSTABLE	ROPE DIA.
LYT-160-7A	3-Strand Rope with Double Locking Safety Snap Hook at each end.	4-7 feet	1/2"
LYT-200-7A	3-Strand Rope with Double Locking Safety Snap Hook at each end.	4-7 feet	5/8"
LYT-200-10A	3-Strand Rope with Double Locking Safety Snap Hook at each end.	7-10 feet	5/8"
LYB-160-7A	Double-Braid Rope with Double Locking Safety Snap Hook at each end.	4-7 feet	1/2"
LYB-200-7A	Double-Braid Rope with Double Locking Safety Snap Hook at each end.	4-7 feet	5/8"
LYB-200-10A	Double-Braid Rope with Double Locking Safety Snap Hook at each end.	7-10 feet	5/8"

Two-in-One Lanyard

Two-in-one rope safety lanyard made of 1/2" three-strand Polyester, with double-locking safety snap hooks; includes Prusik runner. The forged steel safety snap hooks are rated at 5,000 lbs. tensile and 100% proof-load tested.

Part Number: LYT-16P-10S

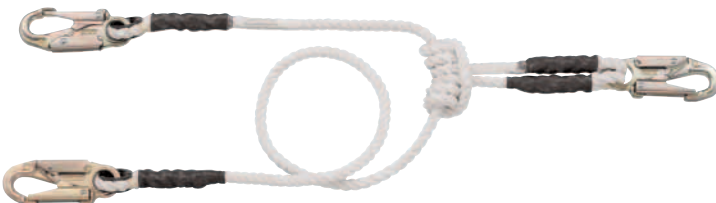


Standard Length: 10 Ft. plus 20" Prusik Runner. Prusik Runners are also sold separately in 3-strand or double-braid rope.

Beranek Lanyard

Hand-spliced 5/8" double-braid with a double-locking safety snap hook. The bitter end is back-spliced.

Standard Lengths: 8 ft. and 10 ft.

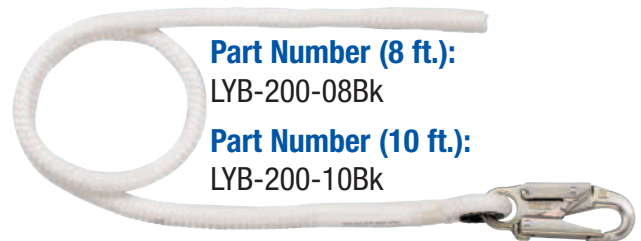

U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com



WATER RESCUE ROPE

Ropes & Accessories

Dyneema® Lightweight Water Rescue Rope

Pelican's water rescue rope is an extremely light, no-stretch braid featuring Dyneema®, the high-strength, no-stretch fiber that meets the needs for coastal and river rescue applications. Constructed with a Dyneema® composite core and a multifilament polypropylene cover, this rope floats and has almost zero water retention.



Extra Strong • Extra Light • Floats

Color: Bright Yellow with Red Marker

SIZE DIA.	Part No.	AVG. TENSILE (lbs.)	Aprx. Weight (lbs. per 100 ft.)	Std. Pkg.
1/4"	3Q-08Y-06S	2,200	1.7	600 ft. spool
5/16"	3Q-10Y-06S	3,850	2.4	600 ft. spool
3/8"	3Q-12Y-06S	4,650	3.3	600 ft. spool

SAFETY & RESCUE HARDWARE

Classic "Big 8" Stainless Steel Descender

Rated at 50 kN (11,250 lbs.)
L.O.A.: 6.8"
WT.: 1.75 lbs.

Part No.: USR-850-S

High Polished Stainless




Classic "Big 8" Aluminum Descender

Rated at 40 kN (9,000 lbs.)
L.O.A.: 6.8"
WT.: 9.2 oz.

Part No.: USR-840-A

Color Anodized

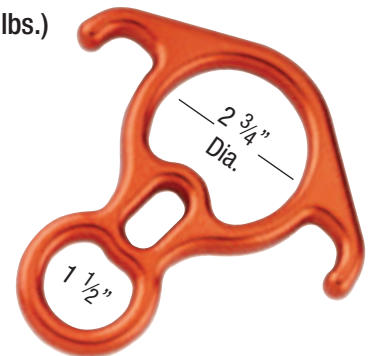


Classic "8" Aluminum Descender

Rated at 35 kN (7,875 lbs.)
L.O.A.: 5.5"
WT.: 3.7 oz

Part No.: USR-835-A

Color Anodized

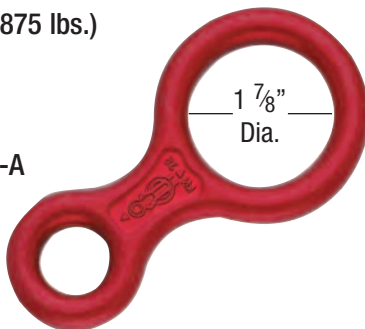

Left or Right Ascenders

Aluminum Alloy
L.O.A.: 7.5"
WT.: 7.9 oz

Part No.: KNG-896



Twin Ascender

Aluminum Alloy
L.O.A.: 8.0"
WT.: 17 oz

Part No.: KNG-874-01



NOTE: 1kN = 224.81 lbs.



U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com

SAFETY & RESCUE HARDWARE

Fast-Eye Double-Lock Safety Hook

Drop-Forged Steel

Rated at 34 kN (7,650 lbs.)

100% Proof-load tested

L.O.A.: 5 5/8"

WT.: 10.6 oz.



Part No.:
USR-01-CFE

Swivel-Eye Double-Lock Safety Hook


Drop-Forged Steel

Rated at 34 kN (7,650 lbs.)

100% Proof-load tested

L.O.A.: 7 1/4"

WT.: 13.1 oz.

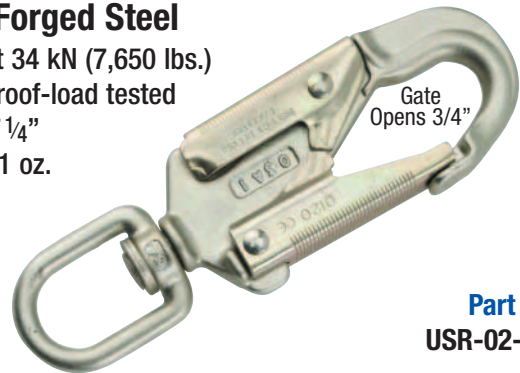

Part No.:
USR-02-CSE

**Swivel-Eye Double-Lock Safety Hook
With Safety Load Gauge**


Drop-Forged Steel

Rated at 34 kN (7,650 lbs.)

100% Proof-load tested

L.O.A.: 7 1/4"

WT.: 14 oz.

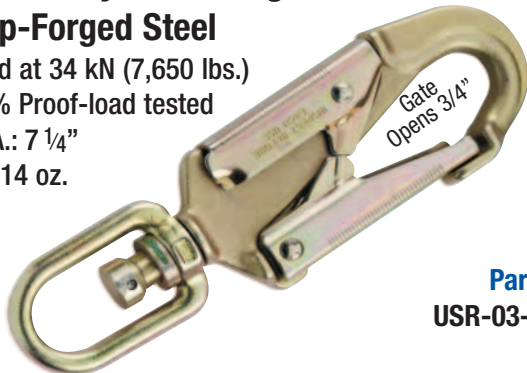

Part No.:
USR-03-CSEL

**Big "D" Carbon Steel
Carabiner (Hvy Duty)**

Forged Steel

Twist-Lock Gate

Rated at 45 kN (10,000 lbs.)

Tested

L.O.A.: 4.75"

WT.: 9 oz



Part No.:
USR-10-CTL

Double-lock Safety Snap

Forged Aluminum


Rated at 27 kN (6,000 lbs.)

100% Proof-load tested

L.O.A.: 6 1/8"

WT.: 5 1/2 oz.

Red or Blue Anodized

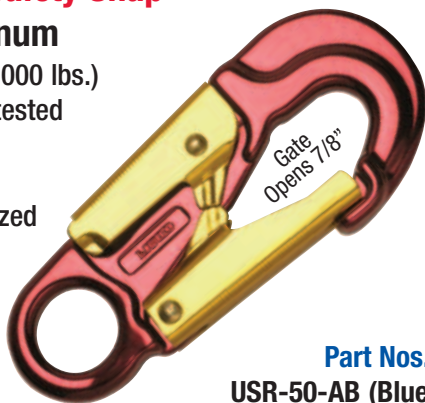

Part Nos.:
USR-50-AB (Blue)
USR-50-AR (Red)

The RED BARON Safety Snap

Forged Aluminum

Locking Double-Action


Non-pinching aluminum levers

Rated at 31 kN (7,000 lbs.)

100% Proof-load tested

L.O.A.: 5 7/8"

WT.: 5 oz.

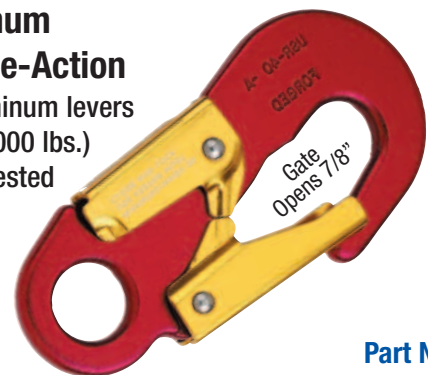

Part No.:
USR-40-A

NOTE: 1kN = 224.81 lbs.



U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com

SAFETY & RESCUE HARDWARE

Large Aluminum Ladder Hook

Rated at 25 kN (5,600 lbs.)
L.O.A.: 9.5"
WT.: 1.1 lbs

Part No.:
USR-LDR-A



Big Rebar Hook Drop-Forged Steel

Rated at 23 kN (5,000 lbs.)
100% Proof-load tested
L.O.A.: 9"
WT.: 1.50 lbs

Part No.:
USR-BRH-C



Scaffold Ladder Hook Drop-Forged Steel

Twist Lock
Rated at 34 kN (7,650 lbs.)
100% Proof-load tested
L.O.A.: 8 5/8"
WT.: 1.57 lbs


Part No.:
USR-04-CTL



Fireman's Ladder Hook With Offset Gate

Twist lock Drop-Forged Steel
Meets NFPA: 1983 (2001 Ed)
Rated at 40 kN (9,000 lbs.)
100% Proof-load tested
L.O.A.: 6 3/4"
WT.: 14.4 oz.

Part No.:
USR-71-CTL

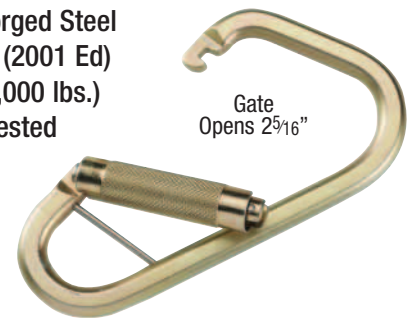

Rescue Carabiner

Aluminum
Twist-Lock Gate
Rated at 25 kN (5,600 lbs.)
100% Proof Load Tested
L.O.A.: 4.25"
WT.: 3 oz

Part No.:
USR-14-ATL



Aluminum Big "D" Carabiner

Triple-Action Twist Lock
Rated at 26 kN (5,850 lbs.)
L.O.A.: 4.5"
WT.: 3.4 oz.

KEYLOCK
Part No.:
USR-106-A3T



Aluminum Snap Hook Carabiner

Triple-Action Twist Lock
Rated at 25 kN (5,600 lbs.)
L.O.A.: 5.3"
WT.: 3.7 oz.

KEYLOCK

Part No.:
USR-140-A3T



Aluminum Swivel Carabiner

Triple-Action Twist Lock
Rated at 24 kN (5,400 lbs.)
L.O.A.: 7.0"
WT.: 7.5 oz.

KEYLOCK

Part No.:
USR-176-A3T



NOTE: 1kN = 224.81 lbs.

U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com



SAFETY & RESCUE HARDWARE

Extra Large Rescue Carabiner

Carbon Steel
Rombo Triple-Action
Twist Lock
Rated at 50kN
(11,250 lbs.)
Tested
L.O.A.: 4.5"
WT.: 8.3 oz.
Part No.: KNG-411-C3TR



Extra Large Rescue Carabiner

Aluminum
Rombo Triple-Action
Rated at 30 kN
(6,750 lbs.)
Tested
L.O.A.: 4.5"
WT.: 3.2oz

Part No.: KNG-911-A3TR



Extra Large Rescue Carabiner

Carbon Steel
Screw Lock Gate
Rated at 50 kN
(11,250 lbs.)
Tested
L.O.A.: 4.5"
WT.: 8.7 oz.
Part No.: KNG-411-CSL



Extra Large Rescue Carabiner

Aluminum
Screw Lock Gate
Rated at 30 kN (6,750 lbs.)
Tested
L.O.A.: 4.5"
WT.: 3.2 oz

Part No.: KNG-911-ASL



X-Large Rescue Carabiner

316 Stainless
Rombo Triple Action
Twist Lock
Rated at 35 kN
(7,875 lbs.)
Tested
L.O.A.: 4.5"
WT.: 9.4 oz
Part No.: KNG-511-S3TR



Classic Oval Carabiner

Carbon Steel
Screw Gate
Rated at 24 kN
(5,400 lbs.)
Tested
L.O.A.: 4.2"
WT.: 6.2 oz.

Part No.: KNG-462-CSL



Classic Oval Screwlock Carabiner

Aluminum
Rated at 22.3 kN
(5,000 lbs.)
Tested
L.O.A.: 4.0"
WT.: 2.3 oz
Part No.: KNG-730-ASL



Asymmetric Carabiner Snap with Bar

Stainless Steel
Rated at 24 kN
(5,400 lbs.)
Tested
L.O.A.: 3.9"
WT.: 5.0 oz

Part No.: KNG-563-10



NOTE: 1kN = 224.81 lbs.

SAFETY & RESCUE HARDWARE

Aluminum Carabiner With Eyelet

Triple-Action Twist Lock
Rated at 22.3 kN
(5,000 lbs.)
Tested
L.O.A.: 4.9"
WT.: 4.0 oz
Part No.: KNG-703-A3T



Aluminum Screwlock Carabiner

Rated at 30 kN
(6,750 lbs.)
Tested
L.O.A.: 4.3"
WT.: 2.5 oz
Part No.: KNG-733-ASL



Large Multi-Use Carabiner

Rated at 30 kN
(6,750 lbs.)
Tested
L.O.A.: 4.6"
WT.: 3.1 oz
Part No.: KNG-778-ASL



Aluminum "Paddle" Carabiner

Rated at 22.3 kN
(5,000 lbs.)
Tested
L.O.A.: 4.5"
WT.: 2.9 oz.
Part No.: KNG-266



Heavy Duty Aluminum Carabiner

Rated at 40 kN
(9,000 lbs.)
Tested
L.O.A.: 4.75"
WT.: 3.1 oz
Part No.: KNG-785-ASL



"HMS" Pear Carabiner

Aluminum
Rombo Triple-Action
Rated at 22 kN
(5,000 lbs.)
Tested
L.O.A.: 4.6"
WT.: 3.3 oz
Part No.: KNG-786-A3T




Oval "D" Carabiner

Carbon Steel
Rated at 26 kN
(5,850 lbs.)
Tested
L.O.A.: 4.125"
WT.: 6 oz
Part No.: KNG-465-CSL



Forged Steel Round Ring

Part No.: DBF-2004-1
Tensile Strength: 33,750 lbs.
I.D.: 3.0" O.D. 4.0"
WT.: 9.4 oz.
Meets ANSI-2359.1

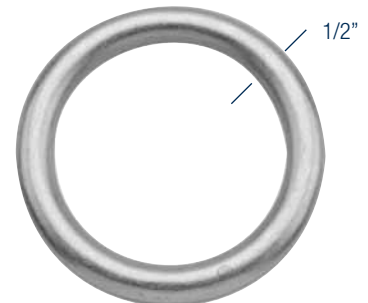

NOTE: 1kN = 224.81 lbs.

SAFETY & RESCUE HARDWARE

Fixed-Side Aluminum Pulley

1-1/4" dia. Aluminum Sheave
for ropes up to 3/8" dia.
L.O.A.: 3 1/4"
WT.: 3.3 oz.


Part No.:
USR-PFB-A



Micro Aluminum Pulley

1-5/16" dia. Aluminum Sheave
for ropes up to 1/2" dia.
L.O.A.: 3"
WT.: 4.2 oz.

Part No.:
USR-PMS-A



Fiddle Block Set

With 50 ft. 1/2" dia.
Polyester Double braid rope.
Designed for the Arborist!

A 'uni-body' anodized aluminum shell
(side plates).
Hard anodized aluminum sheaves
with non-corroding Delrin ball bearings.
All other parts are stainless steel.

Specifications: Please note the recommenda-
tions below are for normal usage. Usage in
exceptionally high load areas over 2,800 lbs.
is not recommended.

Maximum line size: 9/16"
Sheave diameter: 2-5/8"
Safe working load: 2,200 lbs.
Ratio: 5 to 1

Construction: It is what is missing ,
that make them stronger... We have taken
out the centers of the sheaves. The result?
A better block that is both stronger and lighter
at the same time. By removing the center pin,
our engineers have decreased the weight and
increased the strength by allowing the cheeks to
support the sheaves along the outer edges,
distributing the total lead more evenly across
a larger surface area.

With Rope: Part No.: USR-FB-SR

Includes 50 ft. 1/2" dia. polyester
double-braid rope

Without Rope: Part No.: USR-FB-S

Wt. 2.22 lbs.


NOTE: 1kN = 224.81 lbs.



Rope Pulley

2-3/8" dia. Aluminum Sheave
for ropes up to 9/16" dia.
L.O.A.: 4 3/4"
WT.: 8.6 oz.


Part No.:
USR-PSW-A



Swing Side Pulley

2-3/8" dia. Aluminum
Twin Wheels (sheaves)
for ropes up to 9/16" dia.
L.O.A.: 5 3/4"
WT.: 14.9 oz.

Part No.:
USR-PTW-A



U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com



TERMS AND CONDITIONS OF SALE



1. PRICING

All prices and conditions of sale are subject to change without notice.
All orders will be invoiced at our price at time of shipment.



2. CREDIT TERMS


To be eligible for an OPEN ACCOUNT, a minimum initial order of \$250.00 or more is required.
Open accounts will be granted to firms with satisfactory credit history as determined by our Credit Department.
A completed and signed Credit Application is required.

NOTE: We Accept VISA, MASTER CARD and AMERICAN EXPRESS payments.



3. FREIGHT TERMS

All shipments are F.O.B. our plant. (Santa Ana, Calif.) and made freight collect or prepaid and charged depending on the carrier. On behalf of our customers, we endeavor to obtain the most economic shipping costs available. Drop shipments to a third party will incur an extra charge of \$5.00.



4. RETURNED MERCHANDISE

No returns will be accepted without prior agreement from U.S. Rigging Supply. Refunds cannot be given on custom-made merchandise. Materials ordered in error will be subject to a 20% restocking charge and any shipping charges incurred.

All returned merchandise must be accompanied by corresponding invoice and Return Goods Authorization Number (RGA #).



5. SPECIFICATIONS

Any performance stipulations by U.S. Rigging Supply and Pelican Rope Works are conditional on the ultimate user or consumer's determination of the following: proper size and type; proper design and maintenance of the equipment on which products are used; and proper storage, maintenance and periodic inspection of such products during the period of use.

The dimensions, weights, strengths and other specifications shown in this catalog are approximates, subject to variation within reasonable tolerances, and not to be solely used to determine the suitability for any specific application.

Breaking Load: Calculated by random sample testing at our own testing facility. The product is tested to point of break or deformation (an unusable state). Breaking Loads are measured in pounds.

Test certificates available on request.

Working Load Limit (WLL) is calculated at 20% of tested Breaking Load. We recommend that the user not load any product beyond the Working Load Limit as shown for specific products.

6. LIMITED WARRANTY

Ninety-day Limited Warranty - Seller warrants that the goods shall be free from defects in materials and workmanship for a period of ninety (90) days from the date of delivery to Customer. Seller's sole responsibility with respect to claims made within said ninety (90) day period shall be, at its option, to repair or replace any items which it deems to be defective.

NOTE: For detailed Warranty, Terms and General Conditions, see our Credit Application.



U.S. Rigging Supply • 888-260-7444

FAX: 714.545.3311 • www.usrigging.com

Pelican Rope Works • 888-860-7673

FAX: 714.545.7673 • www.pelicanrope.com